



A
B
C
D
E
F

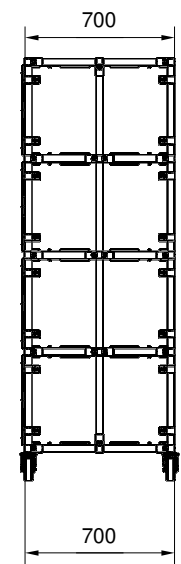

*Single-sided design

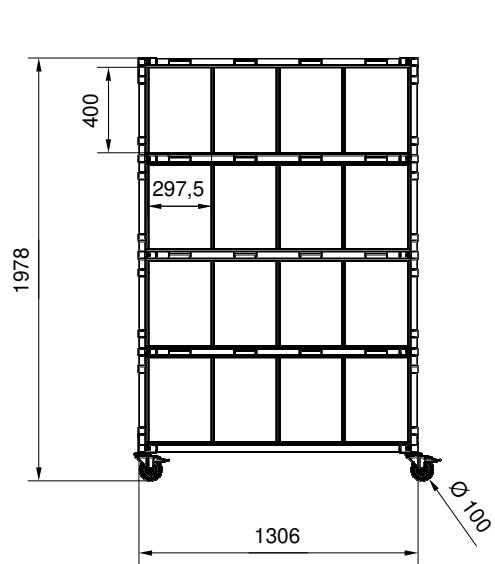

This document is the sole property of **Enprag s.r.o.** and may not be copied, duplicated, used or given to third parties without the written permission from **Enprag s.r.o.** Misuse is subject to penalties and will be legally pursued

Tolerances for shape and condition:
- **DIN ISO 2768-2-K**
Tolerancing:
- **DIN 7167**

Workshop accuracies for general tolerances - Tolerances for length and angle dimensions; DIN ISO 2768-1-v Machining details and finish classification to DIN ISO 1302					
	Total load capacity:		0240 kg		Insert load capacity (*UDL): 015 kg
	*Uniformly Distributed Load				
	Scale:	1:25	Drawn:	Kempný	Checked:
					Date:
					23.10.2026
				Sheet 1 of 1	Rev: 0
PP board insert trolley				Doc. number: 26101431	

A
B
C
D
E
F