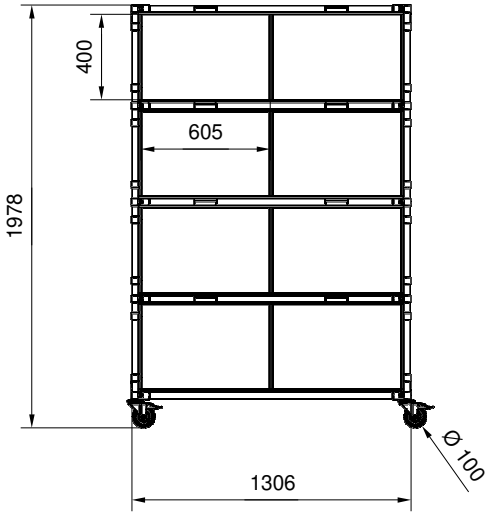

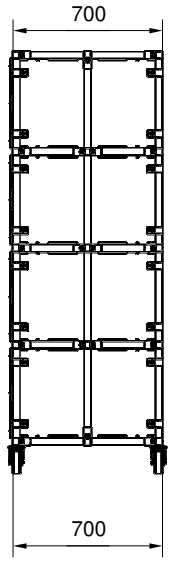

*Single-sided design

Workshop accuracies for general tolerances - Tolerances for length and angle dimensions; DIN ISO 2768-1-v
Machining details and finish classification to DIN ISO 1302

Total load capacity: 0120 kg
*Uniformly Distributed Load

Insert load capacity (*UDL): 015 kg

Scale: 1:25 | Drawn: Kempný | Checked: | Date: 23.10.2026

Sheet 1 of 1 | Rev: 0

PP board insert trolley

Doc. number: 26101432

This document is the sole property of **Enprag s.r.o**.
and may not be copied, duplicated, used or given to
third parties without the written permission from **Enprag s.r.o**.
Misuse is subject to penalities and will be legally pursued

Tolerances for shape and condition:
- **DIN ISO 2768-2-K**
Tolerancing:
- **DIN 7167**